




## BLR/STAS H100 REPLACEABLE STEEL LIQUID AND SUCTION FILTER DRIER

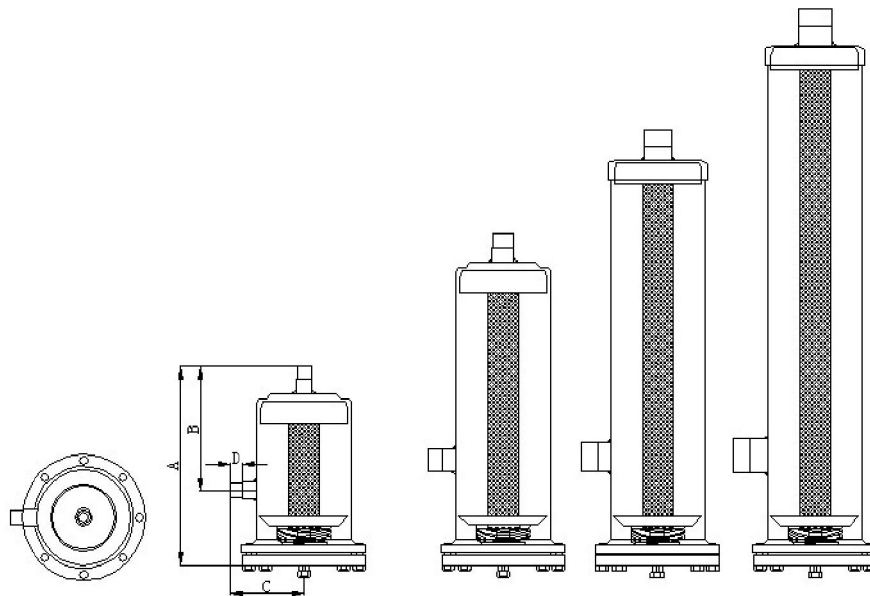

## TECHNICAL DATA

MODEL	CONNECTION	NUMBER OF 48 IN 3 CORE	DESICCANT VOLUME (Cu.In)	DIMENSIONS (In)			
				A	B	C	D
H48 Filter Drier Shells / Single							
BLR/STAS-485T	5/8 ODF	1	48	9.47	6.00	3.78	0.63
BLR/STAS-487T	7/8 ODF			9.69	6.25	3.75	0.78
BLR/STAS-489T	1 1/8 ODF			9.75	6.31	3.84	0.94
BLR/STAS-4811T	1 3/8 ODF			9.84	6.44	3.97	0.94
BLR/STAS-4813T	1 5/8 ODF			9.88	6.50	4.03	1.13
BLR/STAS-4811SV	1 3/8 ODF			9.84	6.44	3.97	0.94
BLR/STAS-4813S-V*	1 5/8 ODF			9.88	6.50	4.03	1.13
BLR/STAS-4817S-V*	2 1/8 ODF			10.06	6.56	4.56	1.34
BLR/STAS-4821S-V*	2 5/8 ODF			10.44	7.03	4.75	1.04
H48 Filter Drier Shells / Double							
BLR/STAS-967T	7/8 ODF	2	96	15.19	11.72	3.75	0.78
BLR/STAS-969T	1 1/8 ODF			15.22	11.78	3.84	0.94
BLR/STAS-9611T	1 3/8 ODF			15.31	11.91	3.97	1.03
BLR/STAS-9613T	1 5/8 ODF			15.38	11.97	4.03	1.13
BLR/STAS-9617T	2 1/8 ODF			15.56	12.03	4.56	1.34
BLR/STAS-9617S-V*	2 1/8 ODF			15.56	12.03	4.56	1.34
BLR/STAS-9617S-V*	2 1/8 ODF			15.56	12.03	4.56	1.34
BLR/STAS-9621S-V*	2 5/8 ODF			15.94	12.50	4.75	1.50
BLR/STAS-9625S-V*	3 1/8 ODF			15.69	12.63	5.44	1.66
H48 Filter Drier Shells / Triple							
BLR/STAS-1449T	1 1/8 ODF	3	144	21.25	17.38	3.84	0.94
BLR/STAS-14411T	1 3/8 ODF			21.34	17.53	3.97	1.03
BLR/STAS-14413T	1 5/8 ODF			21.38	17.59	4.03	1.13
BLR/STAS-14417T	2 1/8 ODF			21.56	17.63	4.56	1.34
H48 Filter Drier Shells / Quadruple							
BLR/BLR/STAS-19211T	1 3/8 ODF	4	192	26.91	23.00	3.97	1.03
BLR/BLR/STAS-19213T	1 5/8 ODF			26.94	23.17	4.03	1.03
BLR/BLR/STAS-19217T	2 1/8 ODF			27.13	23.13	4.56	1.13
BLR/BLR/STAS-1927/5T	7/8 * 5/8			26.50	6.00	3.69	7/8*5/8

Working Pressure[PS]: 33 Bar

Test Pressure[PT]: 48 Bar

Allowable Temperature[TS]: Min. - 10° C / Max. -130° C

Color [RAL]: 5009

General Tolerans [mm]: ± 3